




MARL TECHNOLOGIES INC.

MARL MTXD

Off-road, 4-Speed Rotary / Auger / Coring

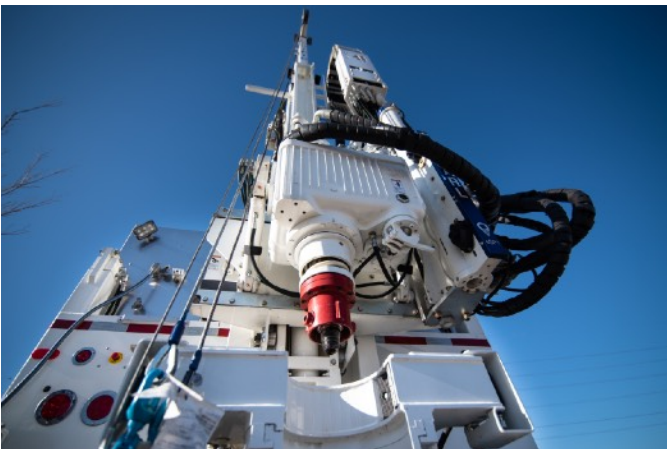

Specifications

Rotary Head

- 4 Speed - We offer different configurations on the gear ratios so the numbers below can vary depending on customer need
- 640 rpm/812ft.lbs
- 320 rpm/1624ft.lbs
- 130 rpm/4059ft.lbs
- 65 rpm/8118ft.lbs

Break Out Clamp

- 60-280mm (2.3" - 11")

Winches

- Can be customized in different configurations
- PL5 - 4500 lb line pull
- PL8 - 7000 lb line pull
- Wireline winch

Drill Pump

- PC 3L8, 52 gpm, 225 psi

Feed

- 34,000lb feed up
- 24,000 lb feed down

Call us to discuss your needs, and see how we can help you stand apart from the competition.



MARL TECHNOLOGIES INC
5603-54 Street
Edmonton, Alberta, Canada T6B 3G8
Toll Free 1-800-404-4463
marltechnologies.com